

DDPA sas

COMPACT 200

EQUIPEMENT DE CLIMATISATION POUR Bus de 7 à 22 PASSAGERS
EQUIPO COMPACTO PARA BUSES DE 7 A 22 PLAZAS
ROOF TOP UNIT FOR BUSES FROM 7 TO 22 SEATS



TECHNOLOGIE ESTHETIQUE QUALITE et SERVICE

TECNOLOGÍA - DISEÑO - CALIDAD Y SERVICIO

TECHNOLOGY - DESIGN - QUALITY AND SERVICE

FICHE TECHNIQUE
FICHA TÉCNICA
TECHNICAL SPECIFICATIONS


EVAPORATEUR EVAPORATOR	CAPACITE FRIGORIFIQUE CAPACIDAD DE REFRIGERACIÓN
Capacité de soufflage <i>Air flow</i>	3000 m ³ / h
Turbines <i>Centrifugal motor fan</i>	4
Consommation sous 12 Volts <i>Consumption to 12 V</i>	64 Amp.
Consommation sous 24 Volts <i>Consumption to 24 V</i>	32 Amp.

CONDENESUR CONDENSER	EXTRA-PLAT Extraplano
Capacité de soufflage <i>Air flow</i>	3.000 m ³ / h
Turbines <i>Fan motors</i>	2
Consommation sous 12 Volts <i>Consumption to 12 V</i>	14 Amp.
Consommation sous 24 Volts <i>Consumption to 24 V</i>	7.4 Amp.

COMPRESSEUR COMPRESSOR	
SD7H15/TM 16	2A/POLI 8K
Embrayage <i>Clutch</i>	12V D.C.
Consommation sous 12 Volts <i>Consumption to 12 V</i>	3 Amp.


CARACTERISTIQUES INF. ADICIONAL ADDITIONAL INF.	
POIDS <i>Weight</i>	59 kg
FLUIDE FRIGORIFIQUE <i>Refrigerant</i>	R 134 A

**PLATINE GENERALE
PLETINA DE POTENCIA**

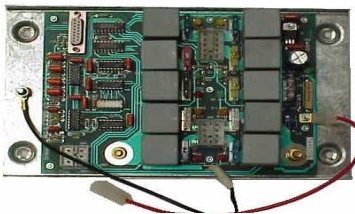

SYSTEME DE CONTRÔLE DE FONCTIONNEMENT "PAR DIODE"
SYSTEMA DE CONTROL CON DIODOS

**COMMANDES INTERIEURES
MANDO CABINA**

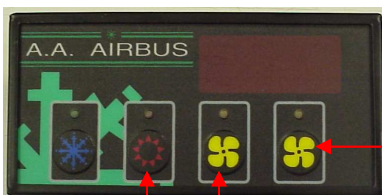


CHAUFFAGE (option)/1ere VITESSE)
CALEFACCIÓN
Y 1ª VELOCIDAD
(OPCIONAL)

3eme vitesse
3ª VELOCIDAD

2eme vitesse
2ª VELOCIDAD

Air Conditionné 1ere vitesse
AIRE ACONDICIONADO Y 1ª VELOCIDAD

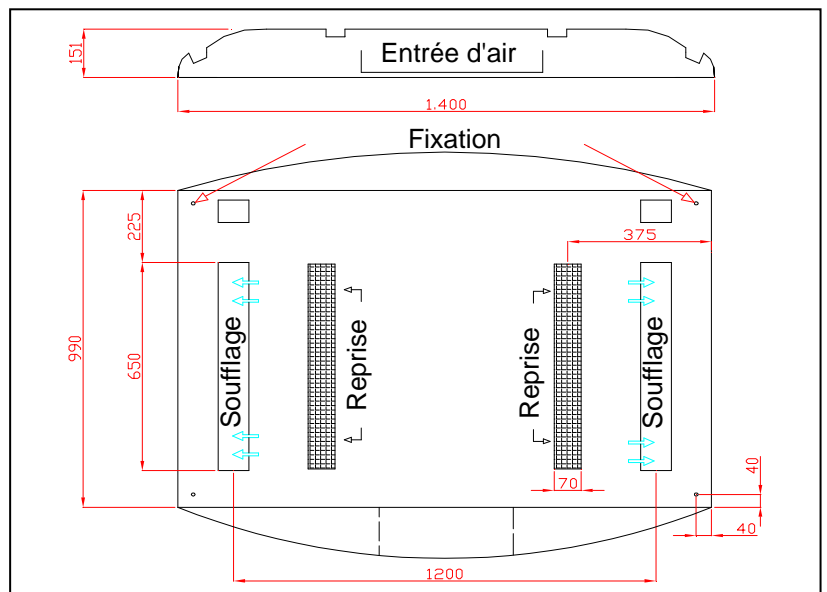

DIMENSIONS

L:1400mm
largeur 990mm
hauteur 151mm
Poids 59kg

DDPA sas

tel: 05.59.88.00.66 ; fax: 05.59.88.05.23

e-mail: ddpa@ddpa.fr ; www.hygloo.com

COMPACT 200



DDPA sas



DDPA sas



DDPA sas



DDPA sas

COMPACT 200



DDPA sas

TEL 05.59.88.00.66 - Fax 05.59.88.05.23

E-mail: ddpa@ddpa.fr